
acking Accessories


White filter
Orange filter
Hot shoe
Manual

arning and Notes

-) The light should be kept dry and ventilated while in use.
-) Please do not expose the light to rain or moisture, internal failure may occur
-) Please do not use the light with over rated voltage
-) It's normal for the fixture to be a little hot when running or a long period of time
-) Please do not look directly into the light when powered on
-) Use a dry cloth to clean the light. You can wash with a bit of neutral detergent to remove difficult dirt, dry with a dry soft cloth.
-) Keep the light out of reach of children
-) Do not disassemble the light. Touching the internal circuitry could hurt you and damage the function of the light. Please contact bescor for all repair needs.
-) Please turn off the light when not in use.

bescor

Series LED User Guide

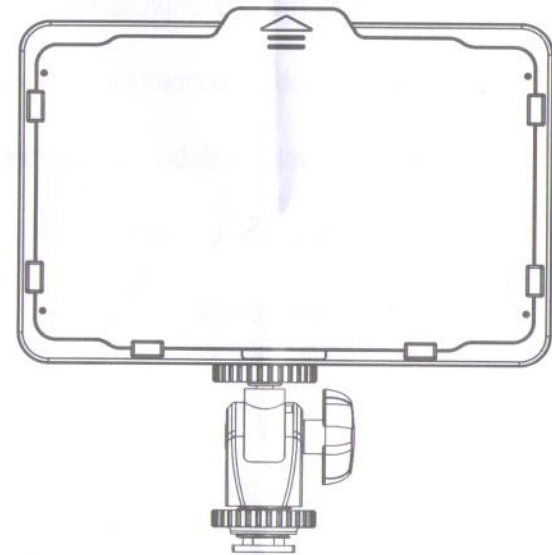

For Support Please Contact
answers@bescor.com

Check Out These Other Great Bescor Products!

Bescor MP101 Motorized Pan Head w/ Remote

Power Adapters & Cables for all Video & DSLR Needs

12 volt & 14.8 volt Battery Systems (Lithium Ion & SLA)

DSLR Camera Battery & Charger Kits

Fluid Head Tripod & Grip/Clip Mounts

Customized Cables, contact for more info

Prosumer Level Affordable LED Lighting


Contact us today!

www.bescor.com
answers@bescor.com

Model Parameter List

Model	WAFFLE
Output Power	180W Equivalent
Luminous Flux	1320LM
LED Quantity	176PCS
Color Temperature	3200K / 5600K (with included filters)
Light Source	45° (Ultra bright) ϕ 5 LED
Dimmer	10%-100%
Life Time	50000h
Lithium Battery Type	NP-F550/750/970
Power Input	DC6.5-17V

● Overview

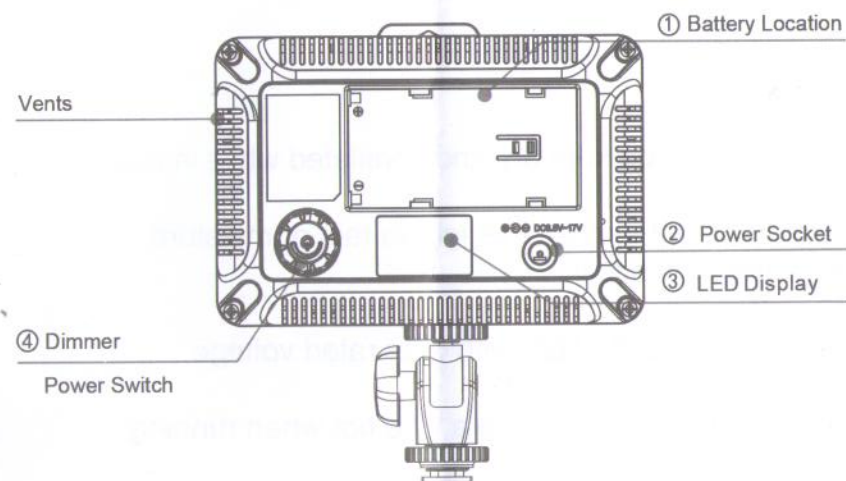

- ① Battery Location
- ② Power Socket
External DC power input

③ LED Display

The LED display shows the brightness from 10 to 99 when the dimmer indicator is red.
(This indicator is not applicable for daylight)

④ Dimmer/Power Switch

Power Switch: Press ④ and hold on for 1 second, turn on the light, then press ④ and hold on for 1 second, the power off.

Brightness control: The brightness is dimmable from 10% to 100%